


SPleats™ CELL Type HEPA Filter 1500 Series

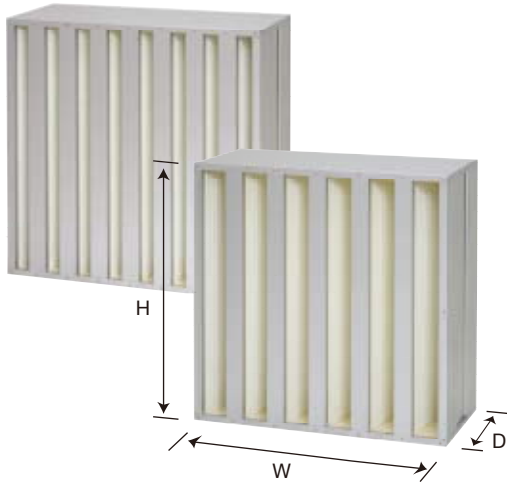

■ Feature

Large Airflow, Long Life
Conformed : IES-RP-CC001.3

■ Materials, Use Conditions

Media	Glass Fiber
Separator	Glass Yarn
Frame	Galvanized Steel
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80°C
Use Moment Max. Humidity	<100%RH, without dew

■ Specifications

Model		Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)	Pressure Drop(Pa)		Efficiency (0.3μm)	Safety
				Initial	Final		UL900
J HEPA	1556-12	610 x 610 x 292	56.6	160	500	95%	
	1555-12	610 x 305 x 292	28.3				
HEPA	1506-15	610 x 610 x 292	32	250		99.97%	CLASS 1
	1505-15	610 x 305 x 292	16				
Standard HEPA	1506-16	610 x 610 x 292	56.6	250		99.97%	CLASS 1
	1505-16	610 x 305 x 292	28.3				
Long Life HEPA	1506-12	610 x 610 x 292	56.6	250		99.97%	CLASS 1
	1505-12	610 x 305 x 292	28.3				
Large Airflow HEPA	1506-11	610 x 610 x 292	60	250		99.97%	CLASS 1
	1505-11	610 x 305 x 292	30				
Extra Airflow HEPA	1506-10	610 x 610 x 292	70	300	600	99.97%	CLASS 1
	1505-10	610 x 305 x 292	35				
High Efficiency HEPA	1566-12	610 x 610 x 292	56.6	250	500	99.99%	CLASS 1
	1565-12	610 x 305 x 292	28.3				

* Safety (UL900) is optional

■ Model Configuration

15** - ** □ □

FN : No Gasket

FI : Flat Type Gasket One Side (Inflow)

FO : Flat Type Gasket One Side (Outflow)

FF : Flat Type Gasket Both Sides

* Specifications are subject to change without notice.

TAIWAN NITTA FILTER CO., LTD.

Head office : Chia Hsin Building 10 Fl., Room No. 1005, 96 Chung Shan N. Rd., Sec. 2, Taipei, Taiwan, R. O. C.

TEL:+886-2-2581-6296 FAX:+886-2-2563-4900

Factory : 2-1, Industrial 2nd Rd, Pinchen Industrial Park, Taoyuan. Taiwan. R.O.C.

TEL:+886-3-469-7551 FAX:+886-3-469-0260

<http://www.nitta.com.tw>



'090629-E