


# SPleats™ CELL Type Medium Filter 1514 Series

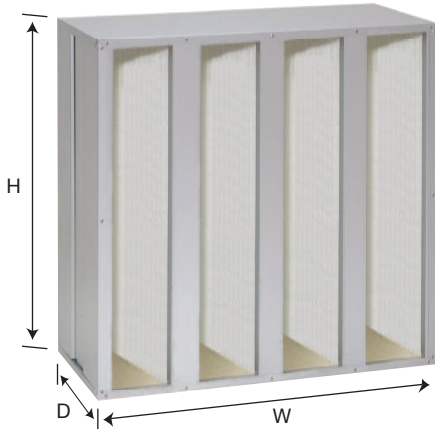

## ■ Feature

Large Airflow, Long Life

## ■ Materials, Use Conditions

Media	Glass Fiber
Separator	Glass Yarn
Frame	Galvanized Steel
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80°C
Use Moment Max. Humidity	<100%RH, without dew

## ■ Specifications

Model	Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)	Pressure Drop(Pa)		Efficiency (Ashrae Dust Spot)	Safety standard
			Initial	Final		UL900
1514-12F	610 x 610 x 292	56	100	300	90-95%	CLASS 1
1514-12H	610 x 305 x 292	28				
SLT1514-12F	610 x 610 x 292	56				
SLT1514-12H	610 x 305 x 292	28				

\* Safety (UL900) is optional

## ■ Model Configuration

□ 1514 - 12 □ □ □

F : Full Size

H : Half Size

FN : No Gasket

FI : Flat Type Gasket One Side (Inflow)

FO : Flat Type Gasket One Side (Outflow)

FF : Flat Type Gasket Both Sides

None : Standard

SLT : Salt Damage Prevention

\* Specifications are subject to change without notice.

### TAIWAN NITTA FILTER CO., LTD.

Head office : Chia Hsin Building 10 Fl., Room No. 1005, 96 Chung Shan N. Rd., Sec. 2, Taipei, Taiwan, R. O. C.

TEL:+886-2-2581-6296 FAX:+886-2-2563-4900

Factory : 2-1, Industrial 2nd Rd, Pinchen Industrial Park, Taoyuan. Taiwan. R.O.C.

TEL:+886-3-469-7551 FAX:+886-3-469-0260

<http://www.nitta.com.tw>



'090109-E