

Standard Size

Model	Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)
		0.5m/s
LL3547-61	305 x 305 x 52	2.3
LL3541-61	610 x 305 x 52	4.8
LL3541-62	610 x 610 x 52	10.1
LL3541-67	610 x 760 x 52	12.7
LL3541-63	610 x 915 x 52	15.4
LL3541-64	610 x 1220 x 52	20.8

* Airflow(CMM) = (H-0.028)m x (W-0.028)m x Face Velocity m/s x 60sec

* For any other size or design please contact us.

Specification

Face Velocity (m/s)	Initial Pressure Drop (Pa)	Efficiency (0.1~0.2µm)
0.5	200	≥99.999% (5N)

Lamination : ±20%

Scanning Test : Silica

Conformed : IES-RP-CC001.3


Safety(Optional) : UL900

Materials, Use Conditions

Media	Low Organic Compounds · Low Boron Glass Fiber
Separator	Polyester Yarn
Frame	Anodized Aluminum
Face Guard	Anodized Aluminum
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80°C
Use Moment Max. Humidity	<100%RH, without dew

Model Configuration

LL3541 - 6 □ □ □ AA

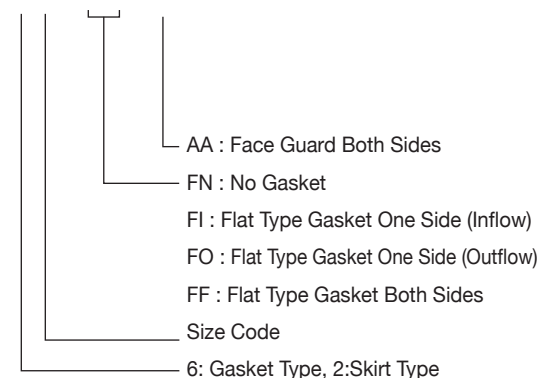

* Specifications are subject to change without notice.