

### Standard Size

Model	Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)	
		0.5m/s	0.85m/s
LL3447-61	305 x 305 x 68	2.3	3.9
LL3441-61	610 x 305 x 68	4.8	8.2
LL3441-62	610 x 610 x 68	10.1	17.2
LL3441-67	610 x 760 x 68	12.7	21.7
LL3441-63	610 x 915 x 68	15.4	26.3
LL3441-64	610 x 1220 x 68	20.8	35.3

\* Airflow(CMM) = (H-0.028)m x (W-0.028)m x Face Velocity m/s x 60sec

\* For any other size or design please contact us.

### Specification

Face Velocity (m/s)	Initial Pressure Drop (Pa)	Efficiency (0.1~0.2µm)
0.5	145	≥99.9995% (5N5)
0.85	250	≥99.999% (5N)

Lamination : ±20%

Scanning Test : Silica

Conformed : IES-RP-CC001.3


Safety(Optional) : UL900

### Materials, Use Conditions

Media	Low Organic Compounds · Low Boron Glass Fiber
Separator	Polyester Yarn
Frame	Anodized Aluminum
Face Guard	Anodized Aluminum
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80°C
Use Moment Max. Humidity	<100%RH, without dew

### Model Configuration

LL3441 - 6 □ □ □ AA

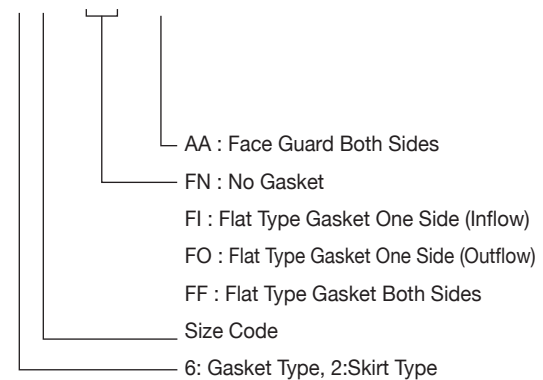

\* Specifications are subject to change without notice.