


SPleats™
CELL Type Medium Filter
1514 Series

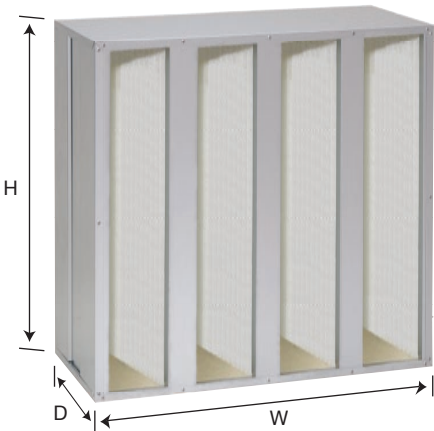

Feature

Large Airflow, Long Life

Materials, Use Conditions

Media	Glass Fiber
Separator	Glass Yarn
Frame	Galvanized Steel
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80℃
Use Moment Max. Humidity	<100%RH, without dew

Specifications

Model	Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)	Pressure Drop(Pa)		Efficiency (Ashrae Dust Spot)	Safety standard
			Initial	Final		UL900
1514-12F	610 x 610 x 292	56	100	300	90~95%	O
1514-12H	610 x 305 x 292	28				
SLT1514-12F	610 x 610 x 292	56				
SLT1514-12H	610 x 305 x 292	28				

* Safety (UL900) is optional

Model Configuration

1514 - 12

F : Full Size
H : Half Size

FN : No Gasket
FI : Flat Type Gasket One Side (Inflow)
FO : Flat Type Gasket One Side (Outflow)
FF : Flat Type Gasket Both Sides

None : Standard
SLT : Salt Damage Prevention

* Specifications are subject to change without notice.

