


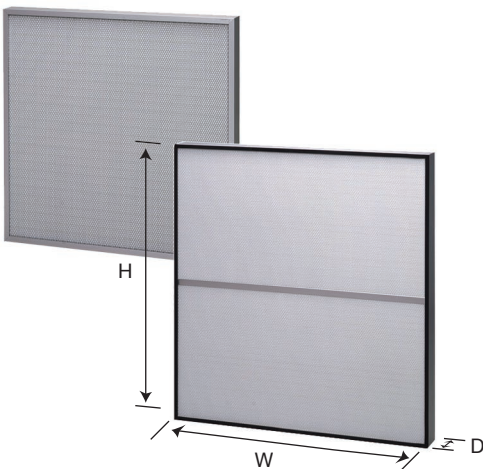

Standard Size

Model	Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)
		0.5m/s
LL3408-61	305 x 305 x 68	2.3
LL3402-61	610 x 305 x 68	4.8
LL3402-62	610 x 610 x 68	10.1
LL3402-67	610 x 760 x 68	12.7
LL3402-63	610 x 915 x 68	15.4
LL3402-64	610 x 1220 x 68	20.8

* Airflow(CMM) = (H-0.028)m x (W-0.028)m x Face Velocity m/s x 60sec
* For any other size or design please contact us.

Specification

Face Velocity (m/s)	Initial Pressure Drop (Pa)	Efficiency (0.3μm)
0.5	100	≥99.97%


Lamination : ±20%
Scanning Test : Silica
Conformed : IES-RP-CC001.3

Materials, Use Conditions

Media	Low Organic Compounds · Low Boron Glass Fiber
Separator	Polyester Yarn
Frame	Anodized Aluminum
Face Guard	Anodized Aluminum
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80°C
Use Moment Max. Humidity	<100%RH, without dew

Model Configuration

LL3402 - 6 □ □ □ AA

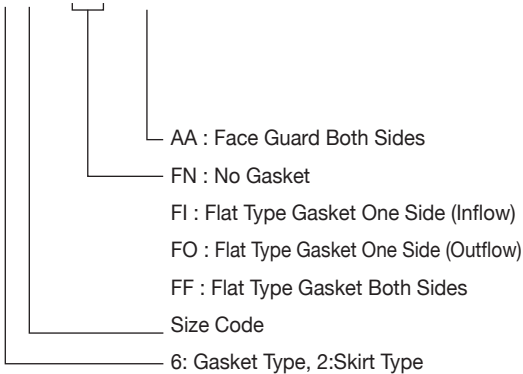

* Specifications are subject to change without notice.