


特長

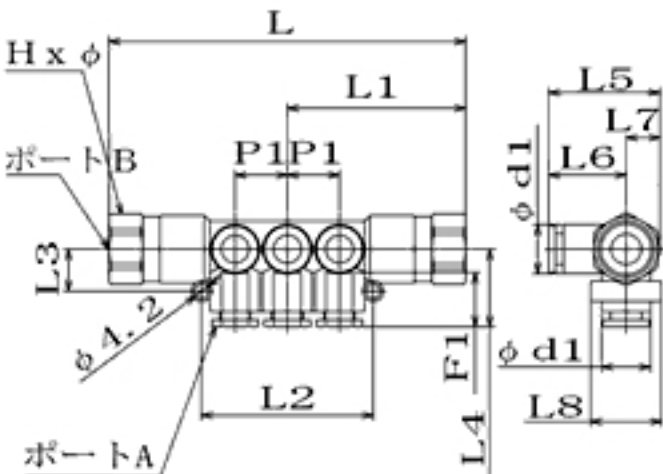

寸法表

品番表示例：EMA（形状）-4（中間出力ポートチューブサイズ）-8（入出力ポートサイズ）-6（入出力ポート数）

プッシュワンEシリーズ/マニホールドBタイプ/ミリ

品番	CAD DATA	適用 チューブ 外径 (mm)	ねじ サイズ (Rc)	A ポート 数	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)	L8 (mm)	F1チ ュー ブ 挿入 長さ (mm)	P1 (mm)	d1 (mm)	HXΦ 二面 幅 (mm)	有効 断面 面積 (mm^2)
EMB4- 1/4-6	DWF		4Rc1/4	6	84	42	36	10	18.2	27.5	18.2	9.3	18.5	13	10.6	9.7	17.0x 18.5	—
	DXF																	
	DWG																	
	MEIO																	
EMB4- 1/4-10	DWF		4Rc1/4	10	105.2	52.6	57.2	10	18.2	27.5	18.2	9.3	18.5	13	10.6	9.7	17.0x 18.5	—
	DXF																	
	DWG																	
	MEIO																	
EMB6- 1/4-6	DWF		6Rc1/4	6	96.4	48.2	44	11.5	20.2	29.5	20.2	9.3	18.5	15	13	12.5	17.0x 18.5	—
	DXF																	
	DWG																	
	MEIO																	
EMB6- 1/4-10	DWF		6Rc1/4	10	122.4	61.2	70	11.5	20.2	29.5	20.2	9.3	18.5	15	13	12.5	17.0x 18.5	—
	DXF																	
	DWG																	
	MEIO																	
EMB8- 3/8-6	DWF		8Rc3/8	6	105.6	52.8	51	12.5	22.1	32.6	22.1	10.5	21	16	15.5	14.5	19.0x 21.0	—
	DXF																	
	DWG																	
	MEIO																	
EMB8- 3/8-10	DWF		8Rc3/8	10	136.6	68.3	82	12.5	22.1	32.6	22.1	10.5	21	16	15.5	14.5	19.0x 21.0	—
	DXF																	
	DWG																	
	MEIO																	