

Standard Size

Model	Dimension H x W x D(mm) (Gasket Excluded)	Airflow (CMM)	
		0.5m/s	0.85m/s
LL3807-61	305 x 305 x 86	2.3	3.9
LL3801-61	610 x 305 x 86	4.8	8.2
LL3801-62	610 x 610 x 86	10.1	17.2
LL3801-67	610 x 760 x 86	12.7	21.7
LL3801-63	610 x 915 x 86	15.4	26.3
LL3801-64	610 x 1220 x 86	20.8	35.3

* Airflow(CMM) = (H-0.028)m x (W-0.028)m x Face Velocity m/s x 60sec

* For any other size or design please contact us.

Specification

Face Velocity (m/s)	Initial Pressure Drop (Pa)	Efficiency (0.3µm)
0.5	90	≥99.99%
0.85	160	≥99.99%

Lamination : ±20%

Scanning Test : Silica


Conformed : IES-RP-CC001.3

Materials, Use Conditions

Media	Low Organic Compounds · Low Boron Glass Fiber
Separator	Polyester Yarn
Frame	Anodized Aluminum
Face Guard	Anodized Aluminum
Sealant	Urethane Resin
Gasket	EPDM Sponge
Use Max. Temperature	≤80°C
Use Moment Max. Humidity	<100%RH, without dew

Model Configuration

LL3801 - 6 □ □ □ AA

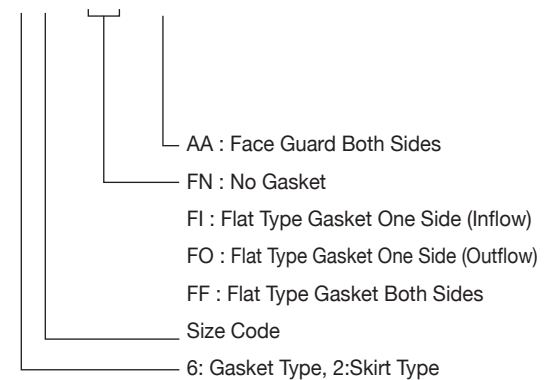

* Specifications are subject to change without notice.